



TYPICAL SECTION  
REPAVING OVER SEWER TRENCH  
IN BRICK OR STONE BLOCK PAVEMENTS WITH BASES

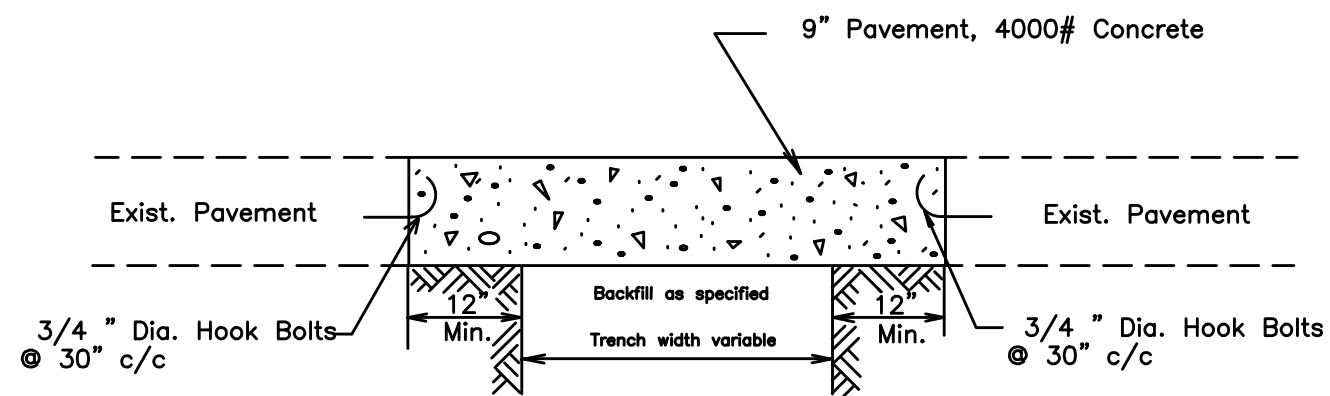

TYPICAL SECTION  
REPAVING OVER SEWER TRENCH  
IN PAVEMENTS WITHOUT BASES

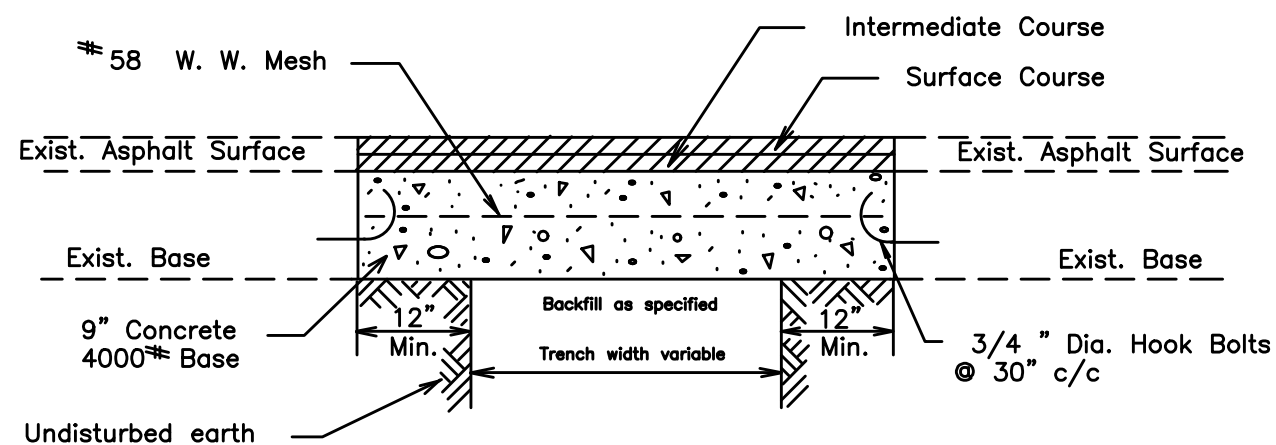

TYPICAL SECTION  
REPAVING OVER SEWER TRENCH  
IN ASPHALT PAVEMENT

**NOTE:**

Hook bolts shall be required when existing pavement or base is concrete Drill and grout Hook Bolts.

REPAVING OVER  
SEWER TRENCH

REVISIONS:

SCALE  
NO SCALE

DATE : DEC. 1998

UNIFORM STANDARDS:

CLEVELAND --- CUYAHOGA COUNTY --- NORTHEAST OHIO REGIONAL SEWER DISTRICT