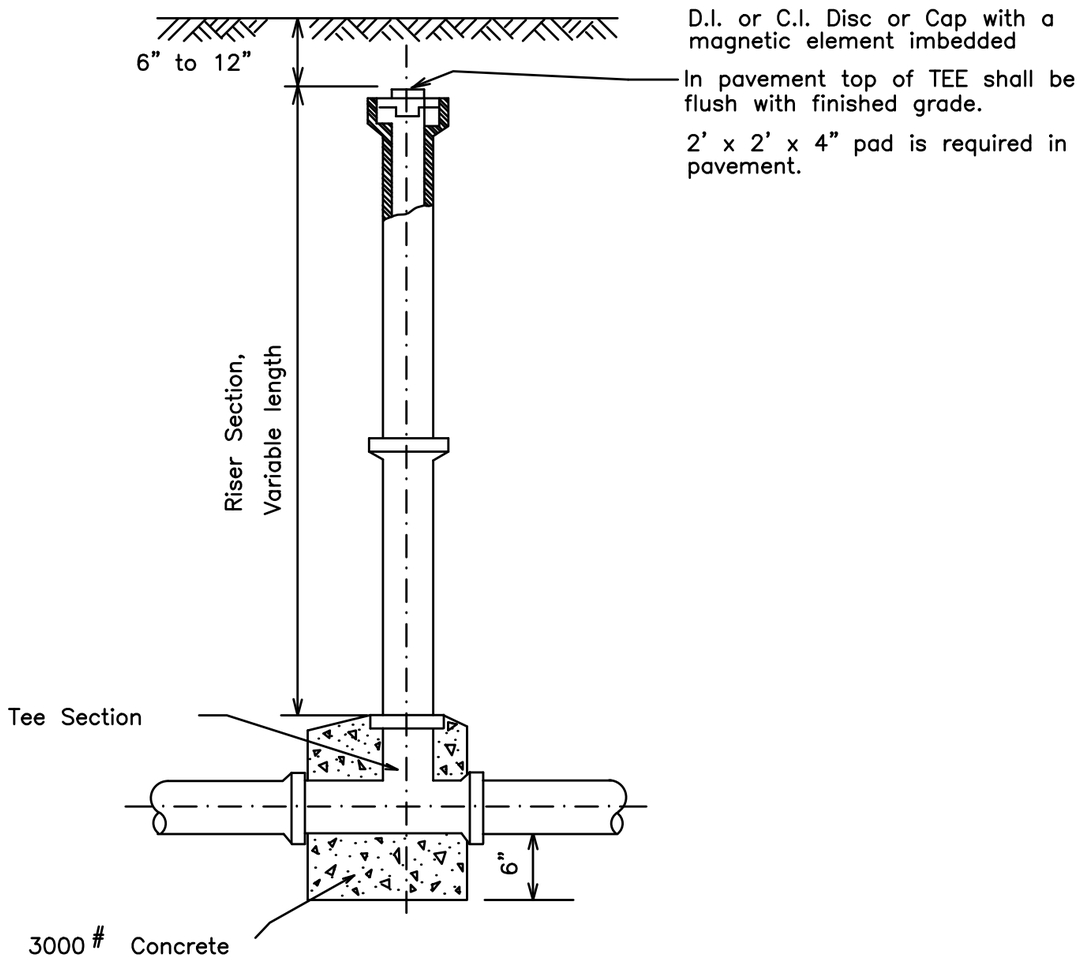

6" X 6" TEST TEE & 6" RISER FOR STORM AND SANITARY SEWERS.

NOTES:

The test tee riser section shall be installed when the connection is extended to the building.
Risers shall be furnished with stoppers upon which shall be placed a cast or ductile iron disc.
Cast or ductile iron disc shall be painted yellow on sanitary sewers.
Concrete encasement for Test Tees is required if ground cover to "T" elevation is less than 3' – 0". If greater than 3' – 0" use coarse interlocking aggregates.

TEST TEE

REVISIONS:	SCALE NO SCALE	DATE : DEC. 1998

UNIFORM STANDARDS: CLEVELAND --- CUYAHOGA COUNTY --- NORTHEAST OHIO REGIONAL SEWER DISTRICT