



TYPICAL SECTION
REPAVING OVER SEWER TRENCH
IN BRICK OR STONE BLOCK PAVEMENTS WITH BASES

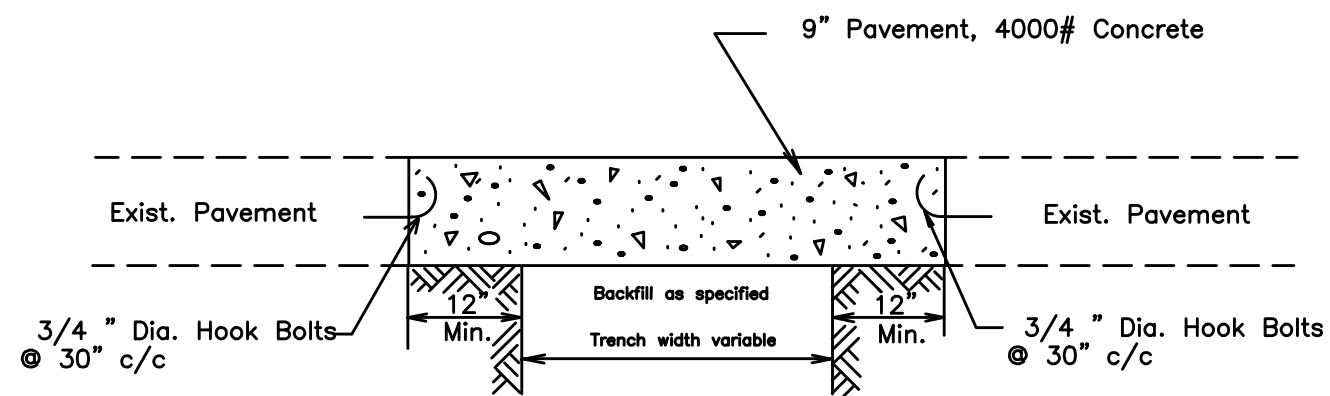

TYPICAL SECTION
REPAVING OVER SEWER TRENCH
IN PAVEMENTS WITHOUT BASES

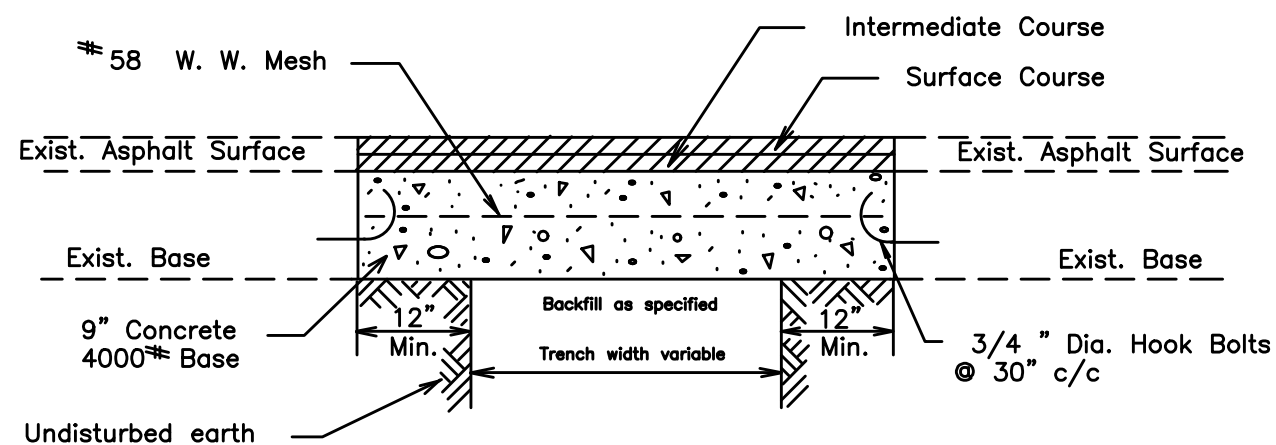

TYPICAL SECTION
REPAVING OVER SEWER TRENCH
IN ASPHALT PAVEMENT

NOTE:

Hook bolts shall be required when existing pavement or base is concrete Drill and grout Hook Bolts.

REPAVING OVER
SEWER TRENCH

REVISIONS:

SCALE
NO SCALE

DATE : DEC. 1998

UNIFORM STANDARDS:

CLEVELAND --- CUYAHOGA COUNTY --- NORTHEAST OHIO REGIONAL SEWER DISTRICT